

Surface Mounting Light



Recessed series

P303-312



Round surface mounting light

P313-318



Square surface mounting light

P319-322



Recessed series





Recessed series

- Die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 8-12mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron,500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.



CE CCC O/E CLASS I IP65



- Die-cast aluminium housing and frame with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part.
- 8mm thickness double layers tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Optical level PMMA lens.
- 2.0W/(m.k)MPCPB.

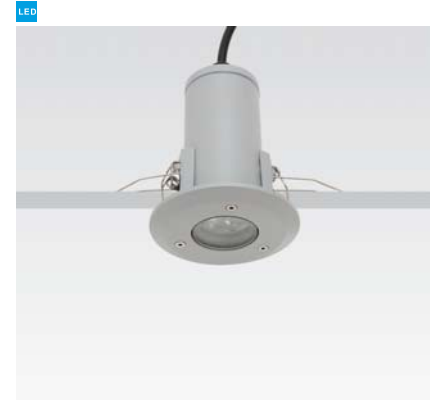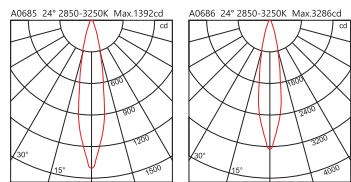

BL-A0685

Optional colors ● ●



JA1A/JB1A
 3PCS CREE XT-E
 3000K/4000K
 350mA LED Driver
 3.6W 321/366lm

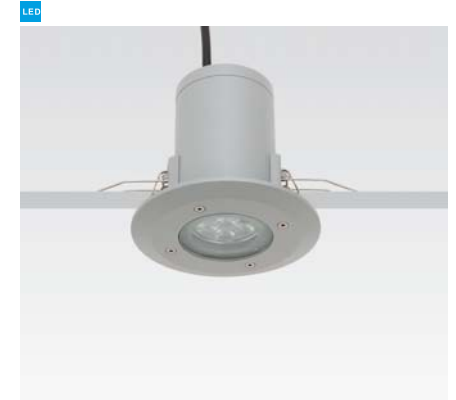

BL-A0686

Optional colors ● ●

JA1A/JB1A
 7PCS CREE XT-E
 3000K/4000K
 350mA LED Driver
 8.4W 749/854lm




EA1A
 GU10
 QPAR16/LED-PAR16
 max. 50W/TW





CE CCC O/E CLASS I IP65

- Die-cast aluminium housing and frame with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part.
- 12mm thickness double layers tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

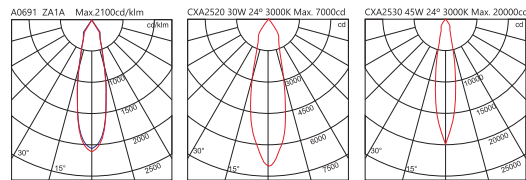

ACCESSORY 配件

Frosted glass
Wide beam angle

Optical CCT

- 3000K
- 4000K
- 5000K



BL-A0691



Optional colors ● ●



ZA1A/ZB1A

CREE XLamp CXA 2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm

Ø140mm



BL-A0692



Optional colors ● ●



ZA1A/ZB1A


CREE XLamp CXA 2520
3000K/4000K
700mA LED Driver
30W 2500/2800lm

Ø190mm



AA1B

E27
TC-ESE
max. 23W



LED



BL-A0693



Optional colors  



ZA1A/ZB1A


CREE XLamp CXA 2530
3000K/4000K
1050mA LED Driver
45W 4000/4300lm

Ø222mm



AA1A


E27
TC-ESE
max. 23W

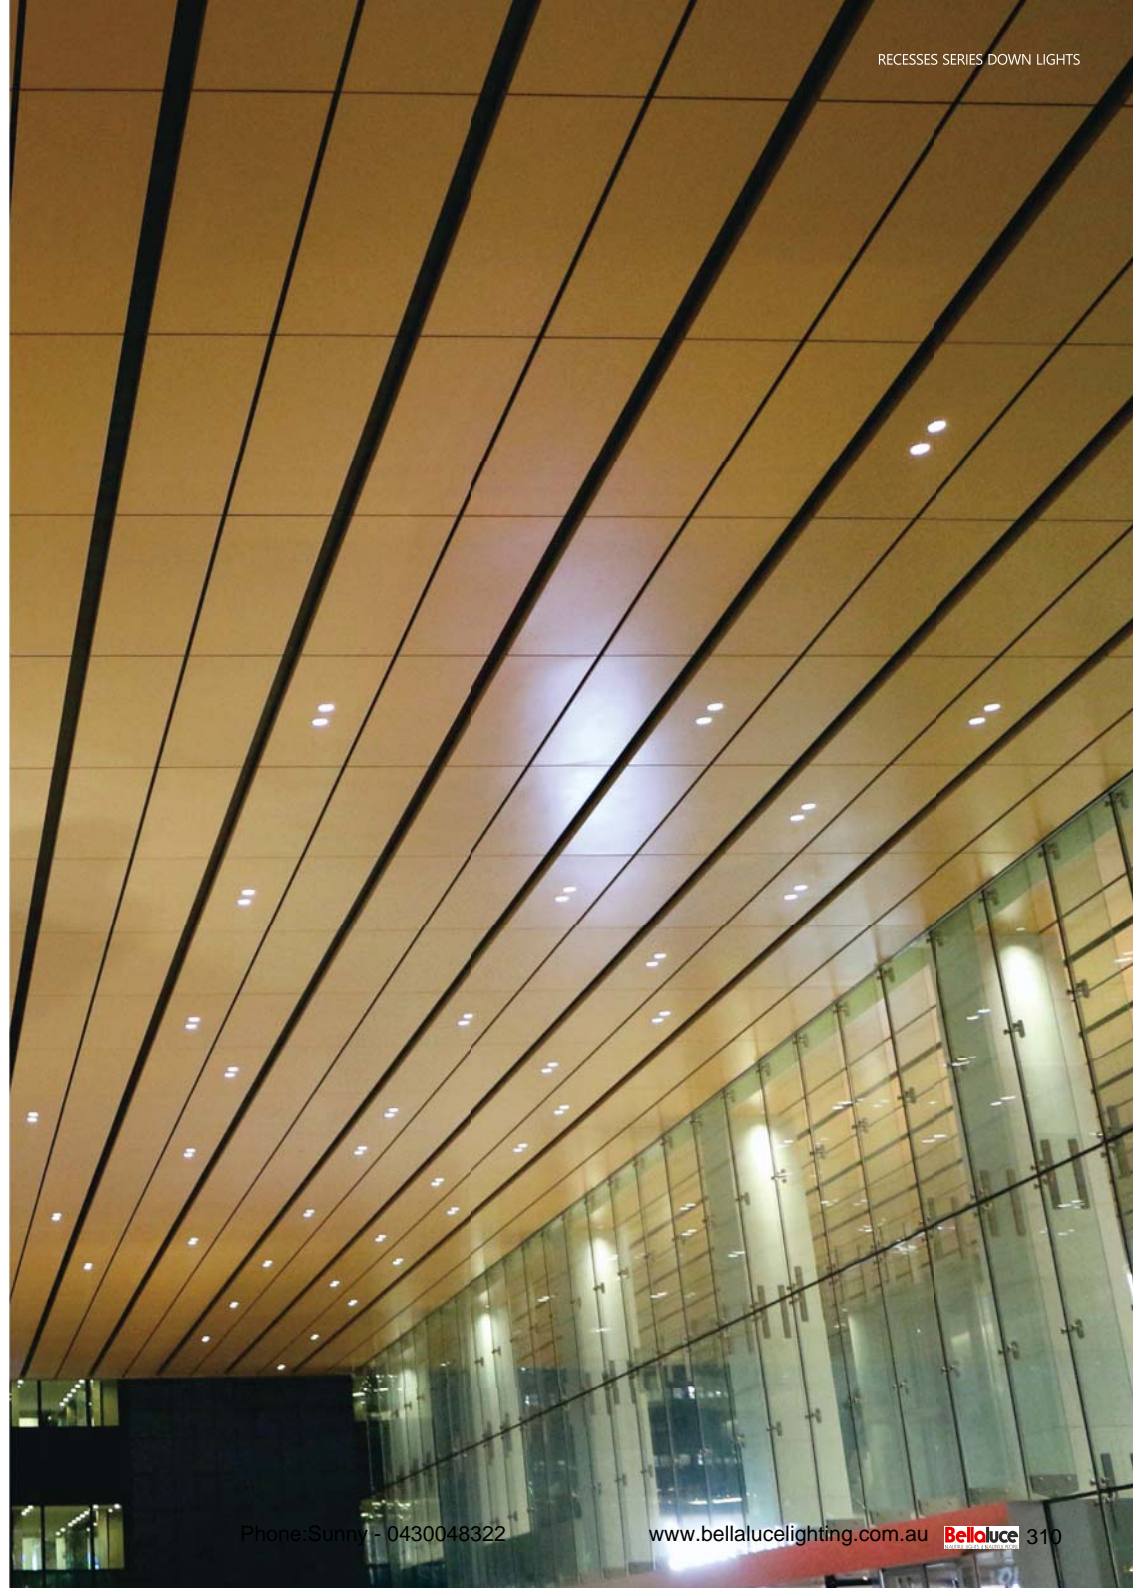




CE CCC CLASS I IP65

- Die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel frame and fastness part.
- 12mm thickness step tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

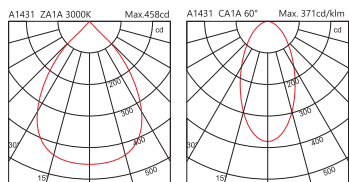


ACCESSORY



Frosted glass
Wide beam angle

Optical CCT

- 3000K
- 4000K
- 5000K

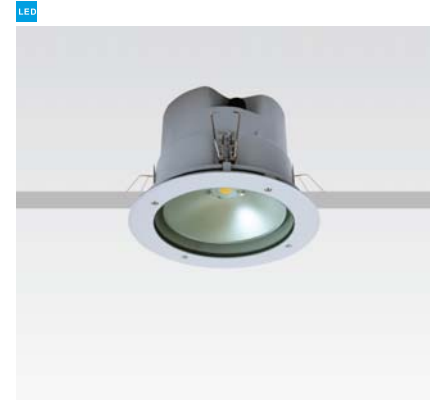

BL-A1431


Optional colors



ZA1A/ZB1A

CREE XLamp CXA 2520
3000/4000K
700mA LED Driver
1 x 30W 2500/2800lm

Ø250mm



ZC1A/ZD1A

CREE XLamp CXA 2530
3000/4000K
1050mA LED Driver
1 x 45W 4000/4300lm



ZE1A/ZF1A

CREE XLamp CXA 2520
3000/4000K
500mA LED Driver
1 x 20W 1900/2000lm



CA1A

1 X G12
HIT-CRI
35-70W



KA1A

1 X RX7s
HIT-DE
70W



Round surface mounting light




Round surface mounting light

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 4mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.



- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and dia-cast aluminium frame.
- 4mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

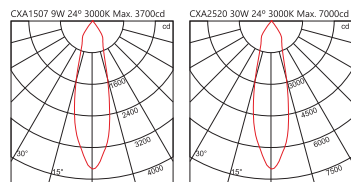


ACCESSORY

Frosted glass
Wide beam angle

Optical CCT

- 3000K
- 4000K
- 5000K

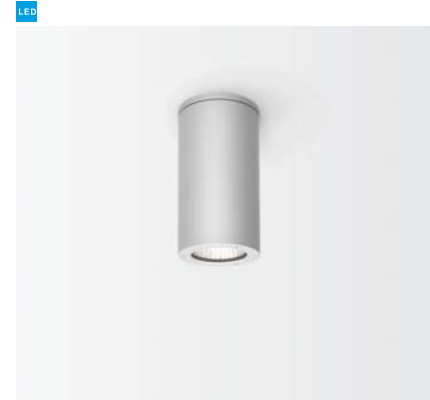


BL-H9935

Optional colors  




ZA1A/ZB1A

1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm





ZC1B/ZD1B

1PCS CREE CXA1507
3000K/4000K
200mA LED Driver
9W 730/780lm



EA1C

GU10
QPAR16/LED-PAR16
max. 50W/7W

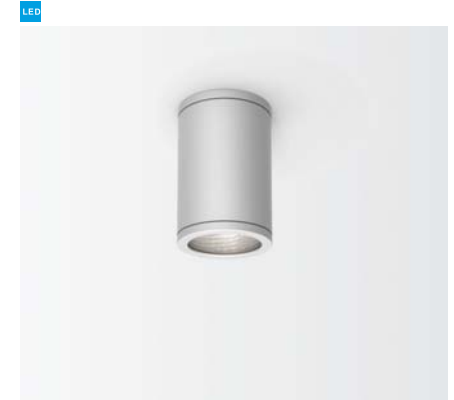


BL-H9917

Optional colors  




ZA1A/ZB1A

1PCS CREE CXA2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm



ZC1A/ZD1A

1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



AA1B

E27
QPAR20/LED-PAR20
max. 50W/7W



LED





BL-H9936

Optional colors  



ZA1A/ZB1A
 1PCS CREE CXA2520
 3000K/4000K
 700mA LED Driver
 30W 2500/2800lm



JA1B/JB1B
 9PCS CREE XT-E
 3000K/4000K
 700mA LED Driver
 22.5W 1710/1845lm



JC1B/JD1B
 9PCS CREE XT-E
 3000K/4000K
 350mA LED Driver
 10.8W 963/1098lm




AA1A
 E27
 QPAR30/LED-PAR30
 max. 75W/12W



RA1C
 1 X G24d
 TC-D
 13-18-26W



CA1C
 1 X G12
 HIT-CRI
 max. 35W



LED



BL-H9937



Optional colors  



ZA1A/ZB1A
 1PCS CREE CXA2530
 3000K/4000K
 1050mA LED Driver
 45W 4000/4300lm




ZC1B/ZD1B
 1PCS CREE CXA2520
 3000K/4000K
 700mA LED Driver
 30W 2500/2800lm



RA1A
 1 X G24d
 TC-D
 18-26W



CA1A
 1 X G12
 HIT-CRI
 max. 35W



Square surface mounting light



322




322

Square surface mounting light

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 3mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.



- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and dia-cast aluminium frame.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

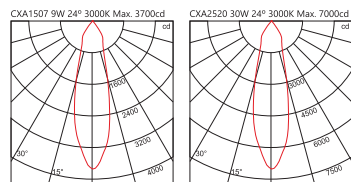


ACCESSORY

Frosted glass
Wide beam angle

Optical CCT

- 3000K
- 4000K
- 5000K

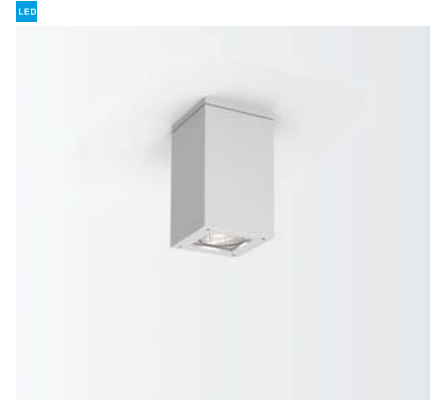

BL-H9938

Optional colors ● ●




ZA1A/ZB1A

1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



ZC1B/ZD1B

1PCS CREE CXA1507
3000K/4000K
200mA LED Driver
9W 730/780lm






EA1C

GU10
QPAR16/LED-PAR16
max. 50W/7W



AA1D

E27
QPAR20/LED-PAR20
max. 50W/7W

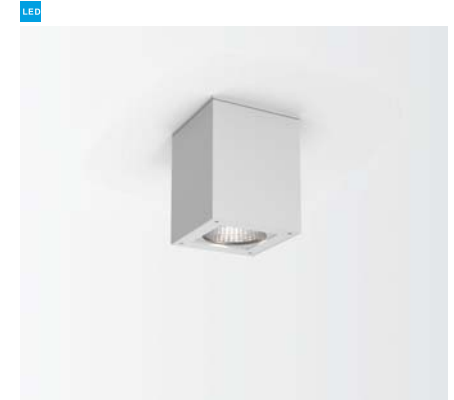

BL-H9939

Optional colors ● ●



ZA1A/ZB1A

1PCS CREE CXA2530
3000K/4000K
1050mA LED Driver
45W 4000/4300lm



ZC1B/ZD1B

1PCS CREE CXA2520
3000K/4000K
700mA LED Driver
30W 2500/2800lm



JA1C/JB1C

9PCS CREE XT-E
3000K/4000K
700mA LED Driver
22.5W 1710/1845lm



JC1C/JD1C

9PCS CREE XT-E
3000K/4000K
350mA LED Driver
10.8W 963/1098lm



AA1B

E27
QPAR30/LED-PAR30
max. 75W/12W



RA1A

1 X G24d
TC-D
18-26W



CA1A

1 X G12
HIT-CRI
max. 35W

