

Belloaluce

BEAUTIFUL LIGHTS 4 BEAUTIFUL PEOPLE



TRADITIONAL SPOT LUMINARE



4/ Page



5/ Page



5/ Page


TRADITIONAL SPOT LUMINARE



Compact structure and elegant outlook,unique design.
Easy but safe installation.
Uniform and even light distribution.




TRADITIONAL SPOT LUMINARE




Die cast aluminum housing, frame and toughened flat glass are fully gasketed with high quality solid silicon gasket.IP65.Super durable thermoset power coat finish. High efficiency pure Aluminum reflector, with optical efficiency up to 90% .Extensive lighting beam selection, with cut-off anti-glare accessory. Various color filters for option. Applicable: building facades, garden landscape,plaza,etc.


Model	Lamp	Power	Input Voltage	CCT	KG
BL-78650225035.241	35W G12	35W	AC220V	3000K	3.5
12° 24°					

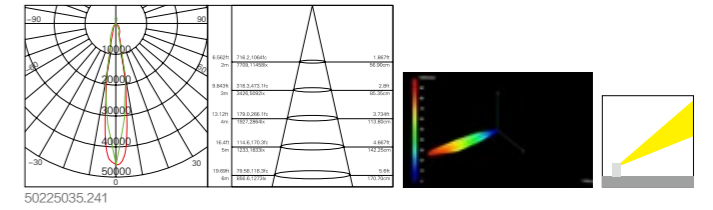

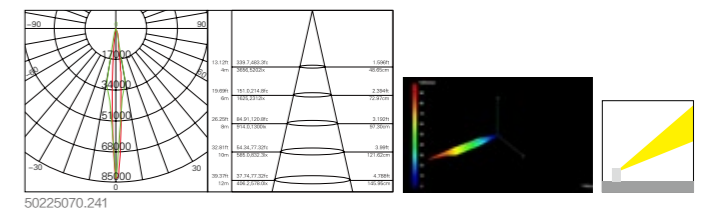


Model	Lamp	Power	Input Voltage	CCT	KG
BL-78650225070.241	70W G12	70W	AC220V	3000K	3.5
12° 24°					




Mounting Dimension



ACCESSORIES


-  Woven Lens(wide beam)
-  Elliptical Spread Lens
-  colour filter

TRADITIONAL SPOT LUMINARE




Die cast aluminum housing, frame and toughened flat glass are fully gasketed with high quality solid silicon gasket.IP65.Super durable thermoset power coat finish. High efficiency pure Aluminum reflector, with optical efficiency up to 90% .Extensive lighting beam selection, with cut-off anti-glare accessory. Various color filters for option. Applicable: building facades, garden landscape,plaza,etc.

Model	Lamp	Power	Input Voltage	CCT	KG
BL-78650160035.241	35W G12	35W	AC220V	3000K	2.9
12° 24°					

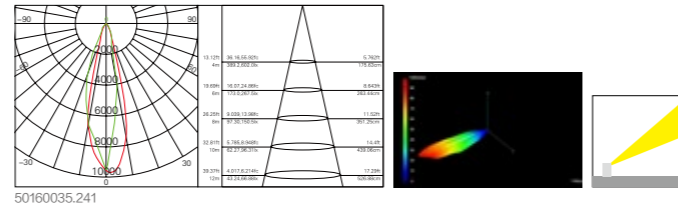


50160035.241

Model	Lamp	Power	Input Voltage	CCT	KG
BL-78650160070.241	70W G12	70W	AC220V	3000K	2.9
12° 24°					

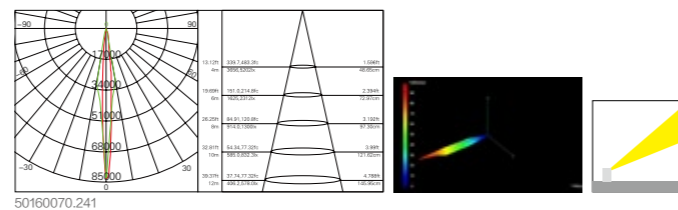


50160070.241


ACCESSORIES

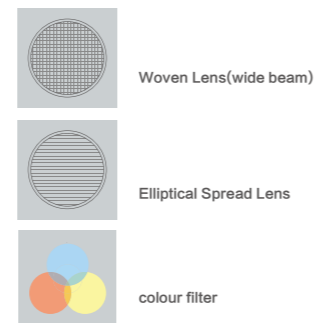

Mounting Dimension




传统投光灯



TRADITIONAL SPOT LUMINARE


Die cast aluminum housing, frame and toughened flat glass are fully gasketed with high quality solid silicon gasket.IP65.Super durable thermoset power coat finish. High efficiency pure Aluminum reflector, with optical efficiency up to 90% .Extensive lighting beam selection, with cut-off anti-glare accessory. Various color filters for option. Applicable: building facades, garden landscape,plaza,etc.

Model	Lamp	Power	Input Voltage	CCT	KG
BL-78650269035.601	35W G12	35W	AC220V	3000K	5.6
60°					

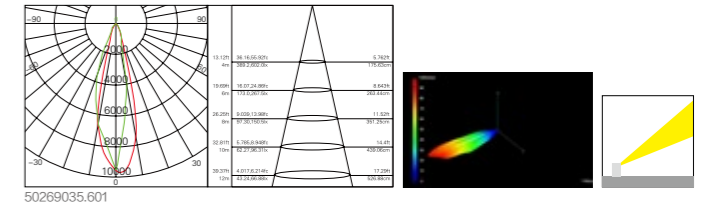


50269035.601

Model	Lamp	Power	Input Voltage	CCT	KG
BL-78650269070.01	70W G12	70W	AC220V	3000K	5.6
60°					

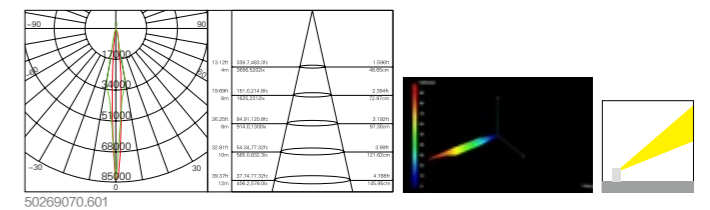

50269070.601

ACCESSORIES

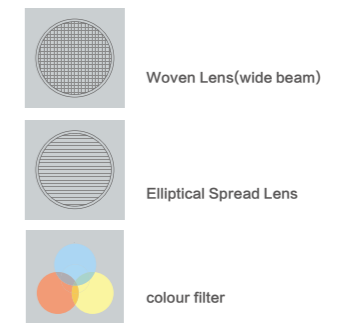

Mounting Dimension

