


CE **RoHS**



CE, RoHS, SAA, TUV approved

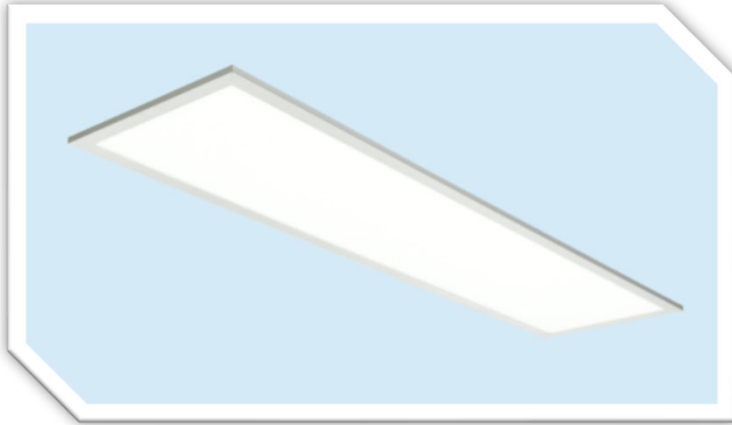




Widely used



Triac, 0-10V and DALI dimmable



High Lumen SMD LED chips with excellent color rendering index

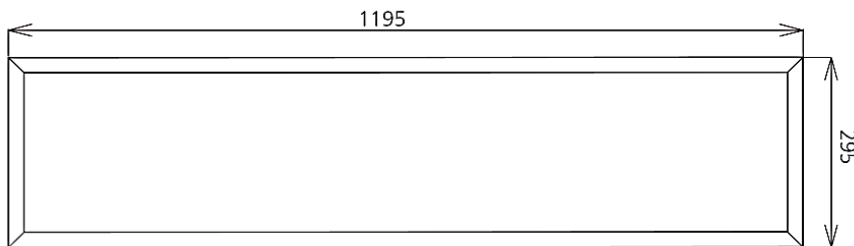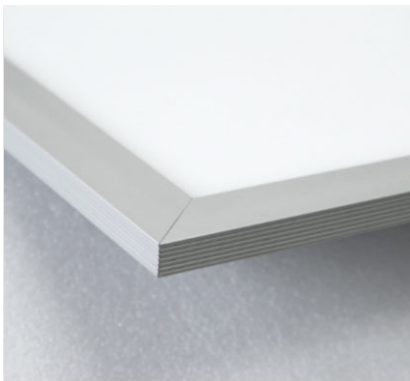

Specifications & Data Sheet

Rev: ver.0002
Job:
Type:
Product Code: BL-TRO-1200

DESCRIPTION

Mounting: T-Bar Recessed
Luminaire Type: Troffer
Beam Angle: Wide
IP Rating: 44

FINISH

Body: Aluminium
Colour/Trim: White
Reflector: Prismatic

DIMENSIONS

Size: To suit T Bar 1200 x 300 x 8mm
Cut-out: N.A

CONTROL


Circuit: Single
Dimming Protocol: DALI Dimmable
Control Gear: Remote

LAMP

Manufacturer: OSRAM
Wattage: 26W
Voltage: 240V
Lumen Output: 2667 Lm
Colour Temp: 4000K
CRI: 85
Life (hrs): 50,000

ACCESSORIES

Polar Diagram Comparison

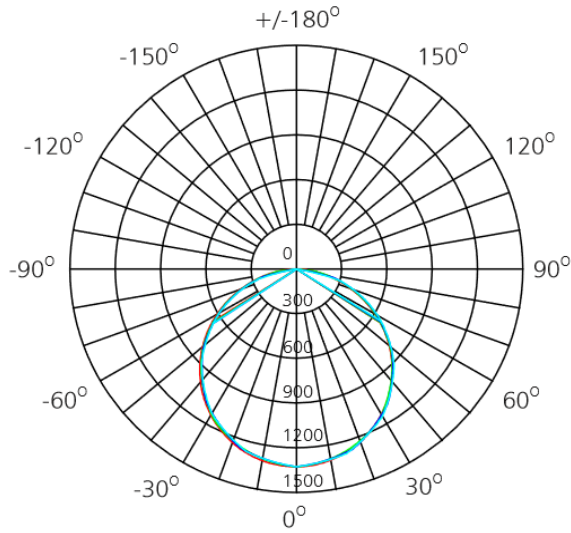


UNIT: cd

- C0/180, 114.5 deg
- C30/210, 114.0 deg
- C60/240, 114.1 deg
- C90/270, 114.4 deg


AVERAGE BEAM ANGLE (50%): 114.2DEG

4000K


Polar intensity diagram

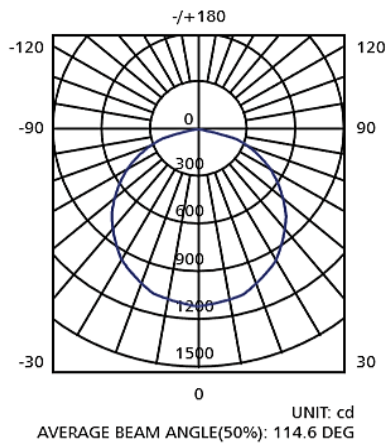


Cartesian intensity diagram

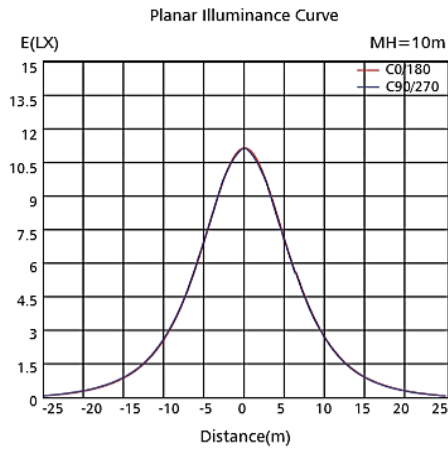

Beam diagram

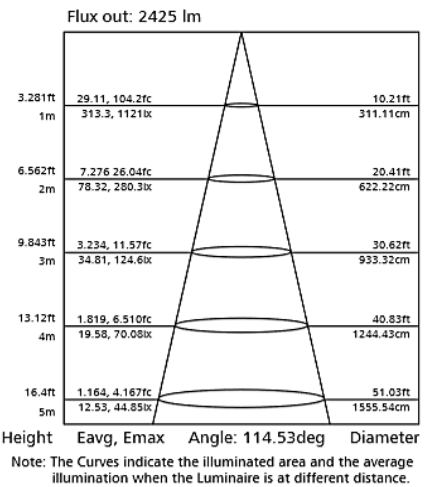

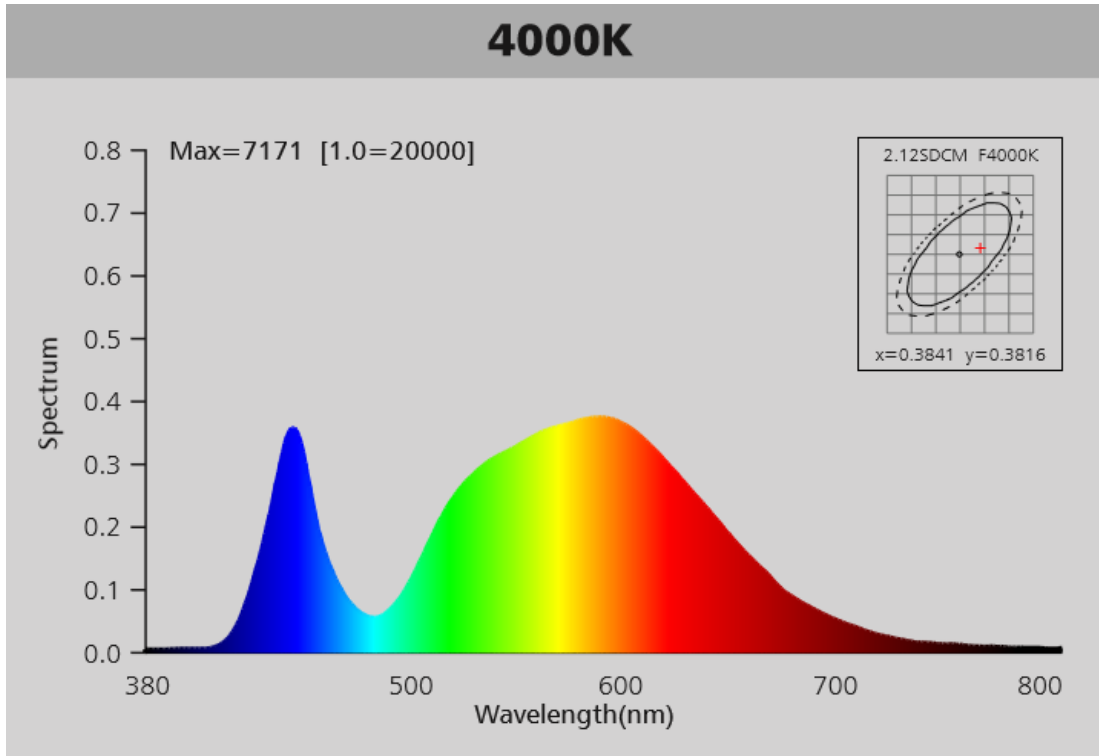

LED Light Decay Rate

