


# Bellaluce

BEAUTIFUL LIGHTS 4 BEAUTIFUL PEOPLE



LED  
CEILING LIGHT



P108 AL37



P110 AL38



P112 AL08



P113 AL12



P114 AL24A/B



P116 AL25



P118 AL02A



P118 AL02B


## LED Ceiling Light /Series/

LED ceiling light in all its forms—most of the time play a secondary role of attention but attach great importance for the general lighting of a room. Innovative lighting solutions with challenging design put your room in best shape.

Upshine ceiling light have a low profile design providing a discreet, robust and stylish emergency, sensor and main luminaires.


Elegantly slim and offered as both emergency and mains luminaires. It allows for the same seamless profile to be used throughout an installation. All options in the range are ideal for all projects where a high quality luminaire is required. Offering wide flexibility in facility lighting best suited to residential and commercial areas.



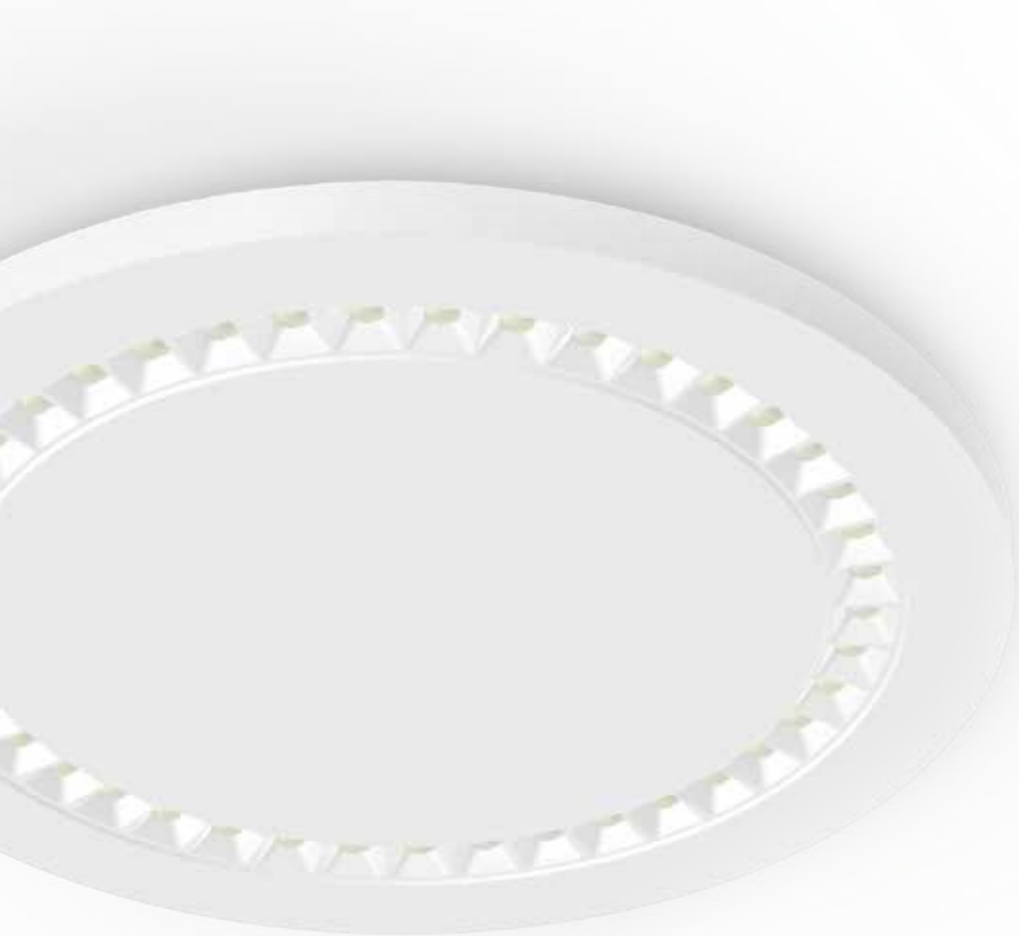

SAA RoHS CE

## BL-786AL37





### ► | Size & Power & Lumen & Size

| (Inch) |     |        | (AxBmm) |
|--------|-----|--------|---------|
| 10"    | 12W | 1520lm | ø250x33 |
| 12"    | 15W | 2000lm | ø300x33 |
| 16"    | 25W | 3120lm | ø400x33 |


### ► | CCT

3000K | 4000K | 5000K | 5700K



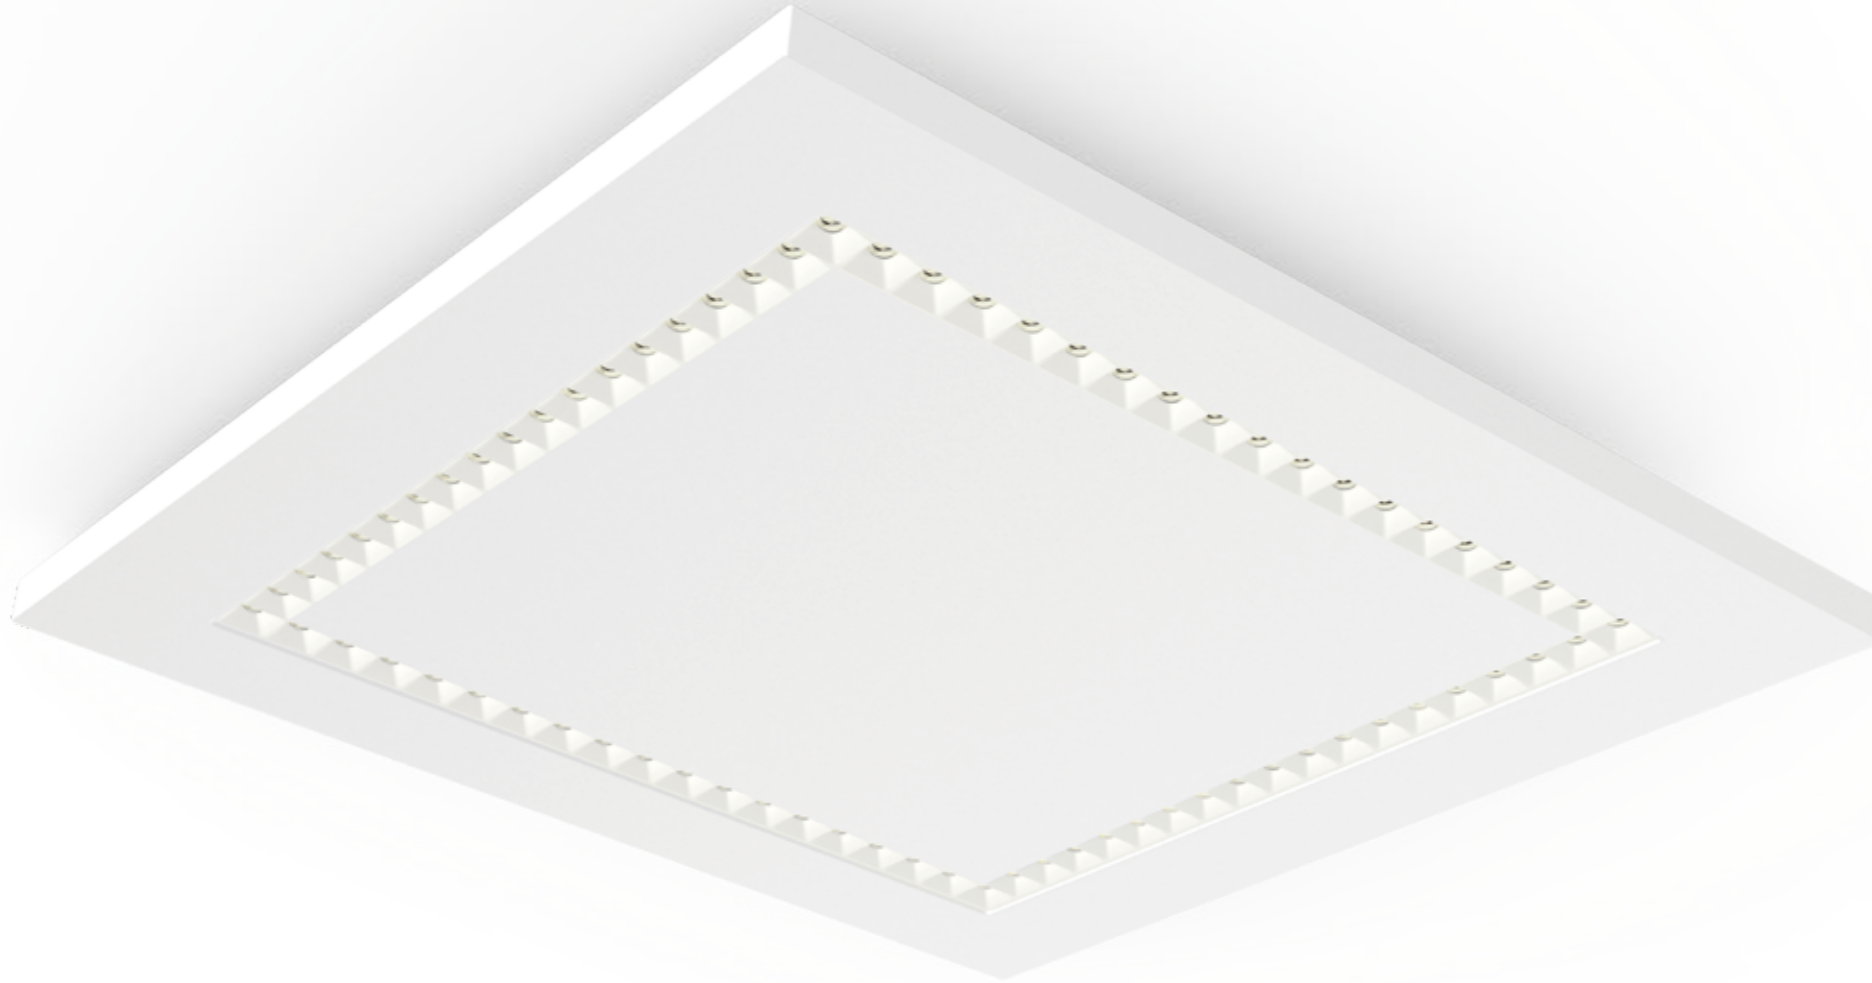

## BL-786AL38





### ► |Size & Power & Lumen & Size

| (Inch) |     |        | (AxAxCmm)  |
|--------|-----|--------|------------|
| 10"    | 12W | 1560lm | 250x250x33 |
| 12"    | 15W | 1890lm | 300x300x33 |
| 16"    | 25W | 3050lm | 400x400x33 |


### ► | CCT

3000K | 4000K | 5000K | 5700K

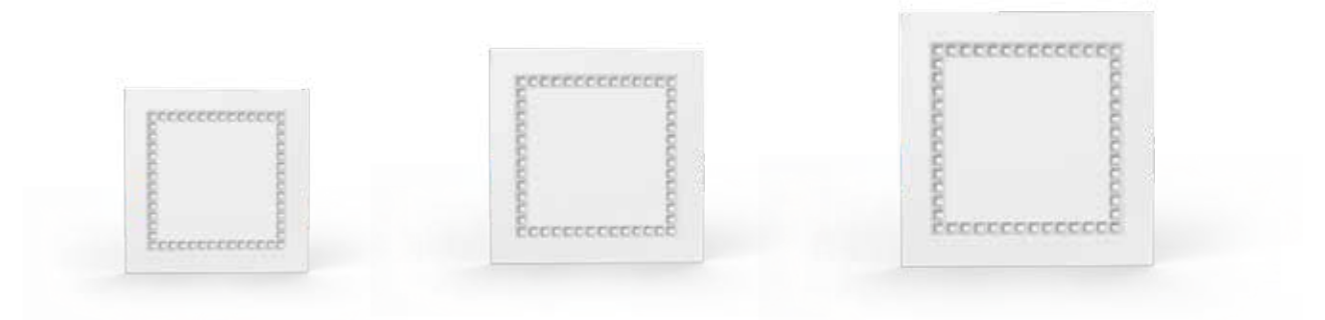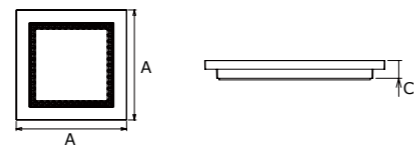



BL-786AL08




► | Size & Power & Lumen & Size

| (Inch) |     |        | (AxBmm) |
|--------|-----|--------|---------|
| 8"     | 12W | 1120lm | ø200x48 |
| 10"    | 12W | 1068lm | ø250x48 |
| 12"    | 18W | 1620lm |         |
|        | 25W | 2180lm | ø300x40 |
| 14"    | 25W | 2200lm | ø350x40 |
| 16"    | 30W | 2500lm | ø400x52 |

► | CCT

3000K | 4000K | 5000K | 5700K



BL-786AL12




► | Size & Power & Lumen & Size

| (Inch) |     |        | (AxAxCmm)  |
|--------|-----|--------|------------|
| 10"    | 12W | 1050lm | 250x250x50 |
| 12"    | 18W | 1602lm |            |
|        | 25W | 2160lm | 300x300x40 |
| 14"    | 25W | 2380lm | 350x350x41 |
| 16"    | 30W | 2570lm | 400x400x51 |

► | CCT

3000K | 4000K | 5000K | 5700K





## BL-786AL24A / B




### ► | Size & Power & Lumen

|     |     |        |
|-----|-----|--------|
| 12" | 25W | 2000lm |
| 16" | 35W | 3290lm |

### ► | CCT

3000K | 4000K | 5000K | 5700K

| ►   Size<br>(Inch) | &<br>(Ax BxCmm) | Size         |
|--------------------|-----------------|--------------|
| 12"(A)             |                 | ø298x51      |
| 12"(B)             |                 | ø298x51x1500 |
| 16"(A)             |                 | ø400x68      |
| 16"(B)             |                 | ø400x67x1500 |

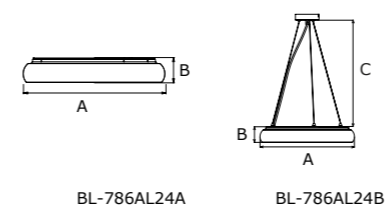



BL-786AL25

AC  
100-240V

AC  
200-240V

PF  
≥0.9

CRI  
80/90

DIM

IP40


120°

► | Size & Power & Lumen & Size

| (Inch) |     |        | (AxBmm)    |
|--------|-----|--------|------------|
| 10"    | 12W | 1190lm | ø250 x48   |
| 12"    | 18W | 1720lm | ø300 x48   |
| 16"    | 25W | 2350lm | ø400 x62.8 |


► | CCT

3000K | 4000K | 5000K | 5700K





## BL-786AL02 / B




### ► | Size & Power & Lumen & Size


| (Inch) |     |        | (AxBmm)  |
|--------|-----|--------|----------|
| 11"(A) | 15W | 1250lm | ø275x100 |
| 14"(A) | 25W | 2120lm | ø350x110 |
| 11"(B) | 15W | 1150lm | ø300x86  |
| 14"(B) | 25W | 1680lm | ø350x96  |

### ► | CCT

3000K | 4000K | 5000K | 5700K



BL-786AL02A



BL-786AL02B