

Wall Light



Round small
mounting box series

P249-260




Round big
mounting box series

P261-266



Particular series

P281-288



Square small
mounting box series

P267-274



American series

P289-294



Square big
mounting box series

P275-280




Full moon series

P295-300



Round small mounting box series

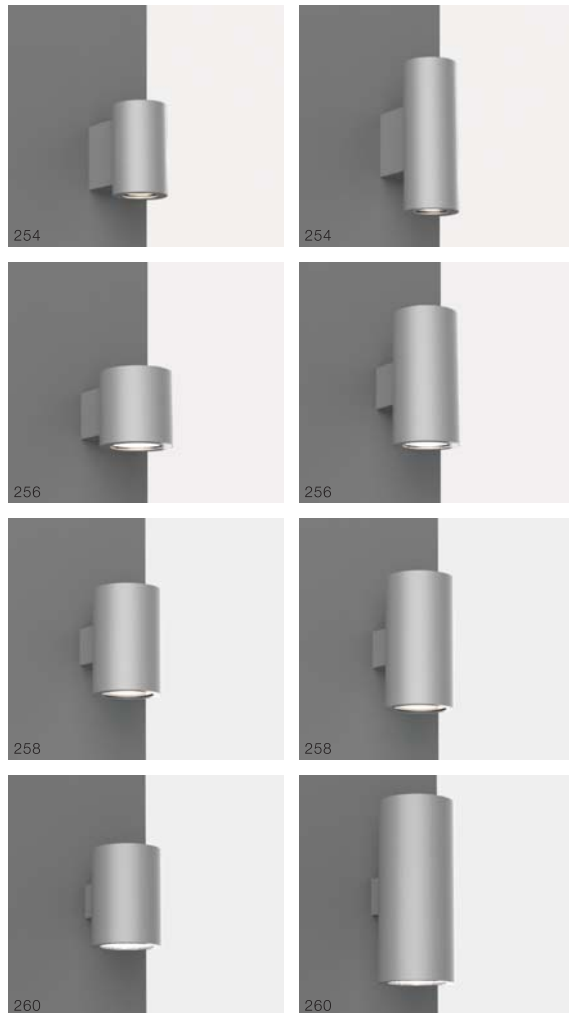

Round small mounting box series

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 4mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.

Products light effect




2-9x1.2W




COB 15W





COB 20W




COB 30W




COB 45W

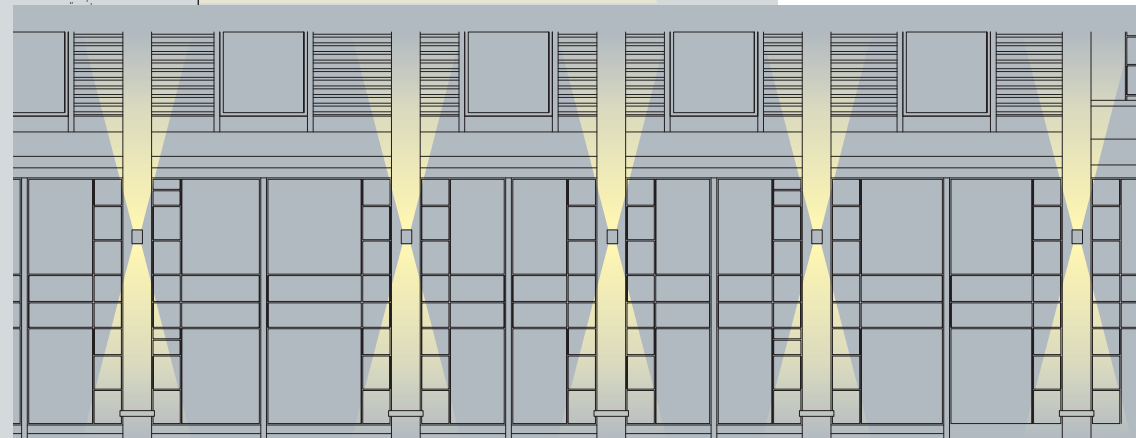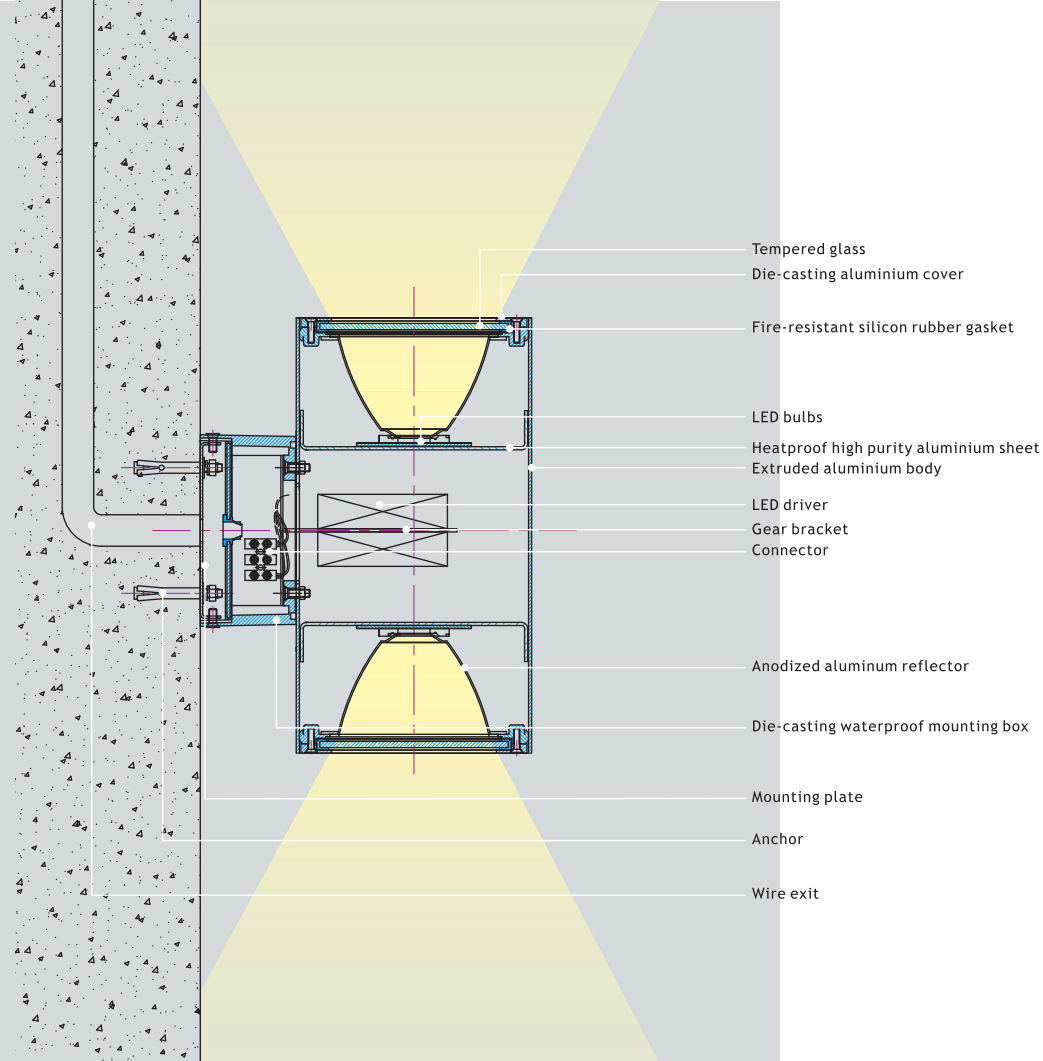

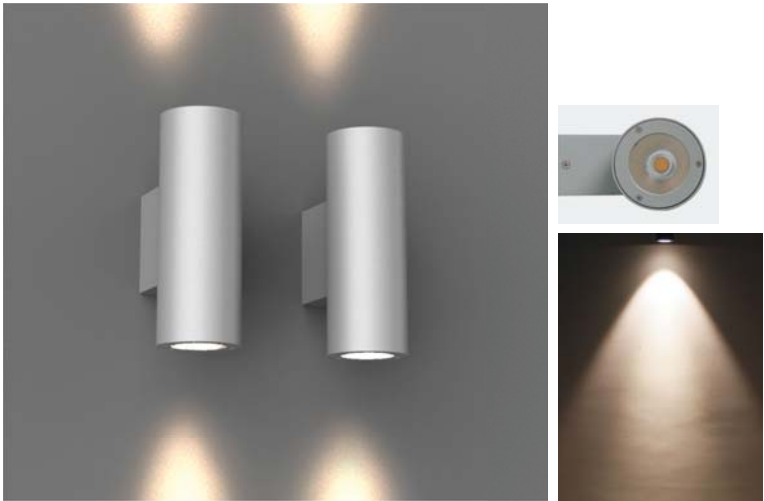

CE CCC O/E CLASS I IP65

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder coating.
- 304# stainless steel fastness parts.
- 4mm thickness tempered glass.
- Fire-resistant silicon seal gasket.

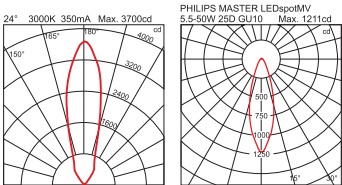

ACCESSORY	Optional CCT	
	3000K	4000K
Frosted glass Wide beam angle	3000K	4000K




BL-B9559


Optional colors



ZA1A/ZB1A
1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



EA1B
1 X GU10
QPAR16/LED-PAR16
max. 50W/7W

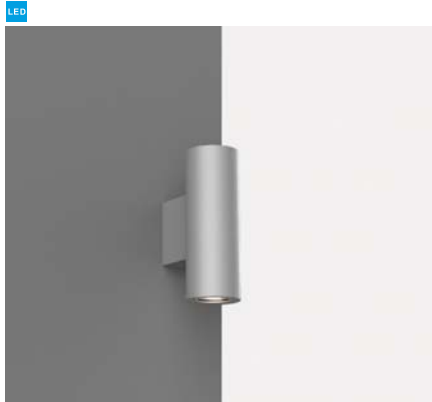


BL-B9558

Optional colors




ZA2A/ZB2A
2PCS CREE CXA1512
3000K/4000K
350mA LED Driver
30W 2580/2760lm






EA2B
2 X GU10
QPAR16/LED-PAR16
max. 50W/7W



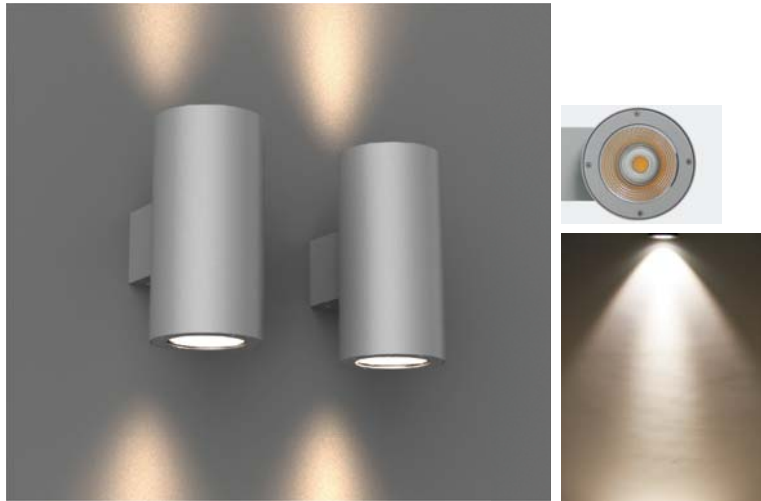

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder coating.
- 304# stainless steel fastness parts.
- 4mm thickness tempered glass.
- Fire-resistant silicon seal gasket.

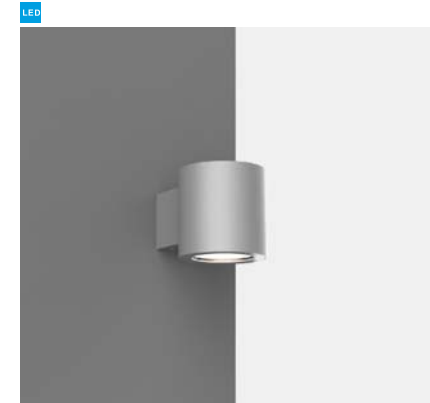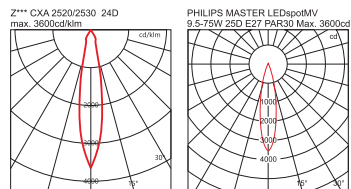

BL-B9561



Optional colors



ZA1A/ZB1A
1PCS CREE CXA2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm



ZC1A/ZD1A
1PCS CREE CXA2520
3000K/4000K
700mA LED Driver
30W 2500/2800lm



JA1B/JB1B
9PCS CREE XT-E
3000K/4000K
350mA LED Driver
10.8W 846/1026lm




JC1B/JD1B
9PCS CREE XT-E
3000K/4000K
700mA LED Driver
22.5W 1530/1845lm



AA1C
1 X E27
QPAR30/LED-PAR30
max. 75W/12W



CA1A
1 X G12
HIT-CRI
max. 35W



BL-B9560



Optional colors



ZA2A/ZB2A
2PCS CREE CXA2520
3000K/4000K
500mA LED Driver
40W 3800/4000lm



ZC2A/ZD2A
2PCS CREE CXA2520
3000K/4000K
700mA LED Driver
60W 5000/5600lm



JA2B/JB2B
18PCS CREE XT-E
3000K/4000K
350mA LED Driver
21.6W 1692/2052lm




JC2B/JD2B
18PCS CREE XT-E
3000K/4000K
700mA LED Driver
45W 3060/3690lm




AA2C
2 X E27
QPAR30/LED-PAR30
max. 75W/12W





CA2D
2 X G12
HIT-CRI
max. 35W



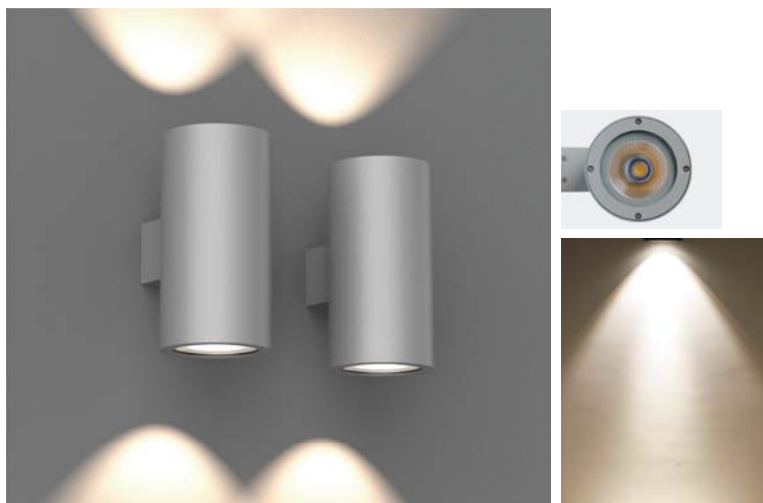



- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and dia-cast aluminium frame.
- 4mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

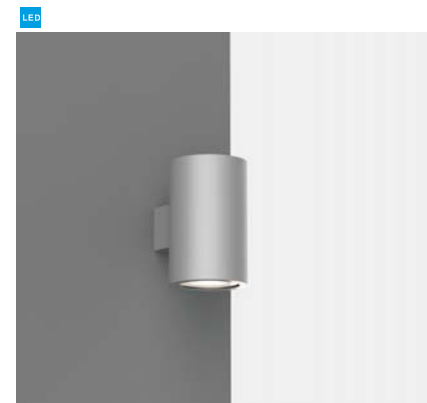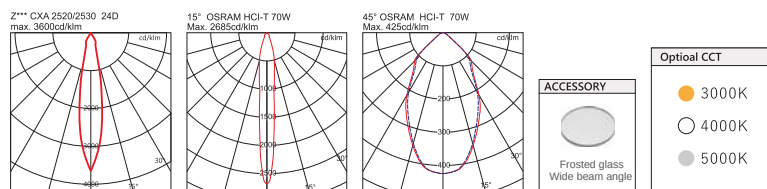


BL-B9557

Optional colors

ZA1A/ZB1A	ZC1A/ZD1A
1PCS CREE CXA2520	1PCS CREE CXA2530
3000K/4000K	3000K/4000K
700mA LED Driver	1050mA LED Driver
30W 2500/2800lm	45W 4000/4300lm




CA1B
1 X G12
HIT-CRI
35W-70W





BL-B9556

Optional colors

ZA2A/ZB2A	ZC2A/ZD2A
2PCS CREE CXA2520	2PCS CREE CXA2530
3000K/4000K	3000K/4000K
700mA LED Driver	1050mA LED Driver
60W 5000/5600lm	90W 8000/8600lm




CA2B
2 X G12
HIT-CRI
35W-70W






CE CCC O'EL CLASS I IP65

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and dia-cast aluminium frame.
- 4mm thickness tempered glass.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

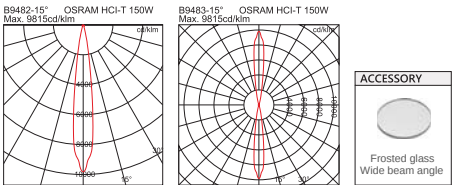


BL-B9482

Optional colors




BL-B9483

Optional colors

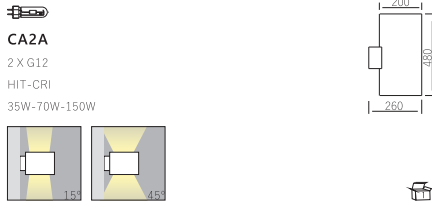

Round big mounting box series


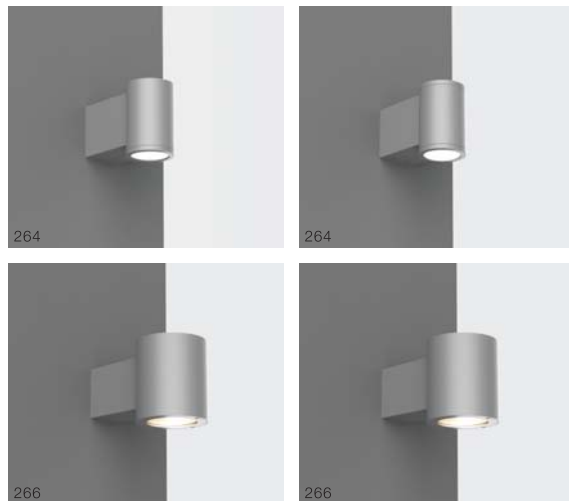


Round big mounting box series

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 4mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.



- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder coating.
- 304# stainless steel fastness parts.
- 4mm thickness tempered glass.
- Fire-resistant silicon seal gasket.



Optional CCT	
●	3000K
○	4000K
●	5000K



BL-B9569

Optional colors



ZA1A/ZB1A

1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



ZC1A/ZD1A

1PCS CREE CXA2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm




MA1A

1X PGJ5
HIT-TM-CRI
20-35W



AA1B

1 X E27
QPAR20/LED-PAR20
max. 50W/TW



BL-B9568

Optional colors



ZA2A/ZB2A

2PCS CREE CXA1512
3000K/4000K
350mA LED Driver
30W 2580/2760lm



ZC2A/ZD2A

2PCS CREE CXA2520
3000K/4000K
500mA LED Driver
40W 3800/4000lm




MA2A


2X PGJ5
HIT-TM-CRI
20-35W




AA2B

2 X E27
QPAR20/LED-PAR20
max. 50W/TW



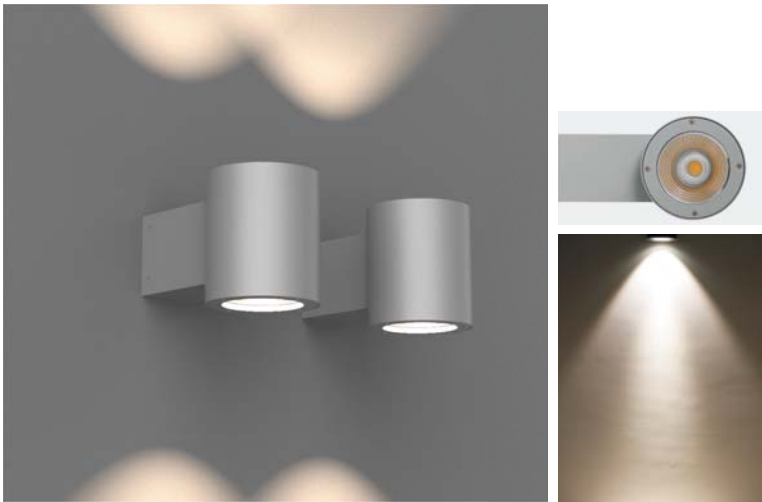

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and dia-cast aluminium frame.
- 4mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

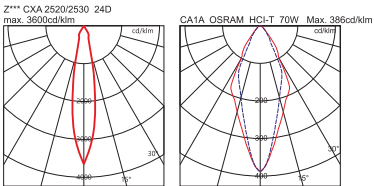

ACCESSORY


Frosted glass
Wide beam angle

Optical CCT

3000K

4000K


5000K

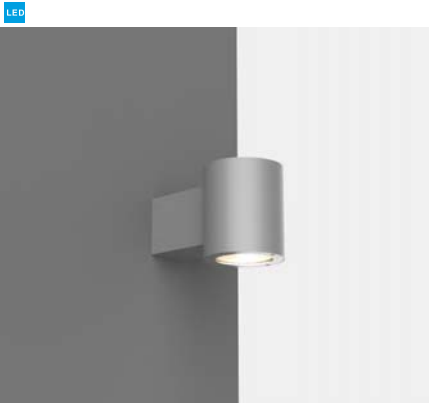

BL-B9571

Optional colors

ZA1A/ZB1A	ZC1A/ZD1A
1PCS CREE CXA2520	1PCS CREE CXA2520
3000K/4000K	3000K/4000K
500mA LED Driver	700mA LED Driver
20W 1900/2000lm	30W 2500/2800lm




CA1A

1 X G12

HIT-CRI


35W-70W

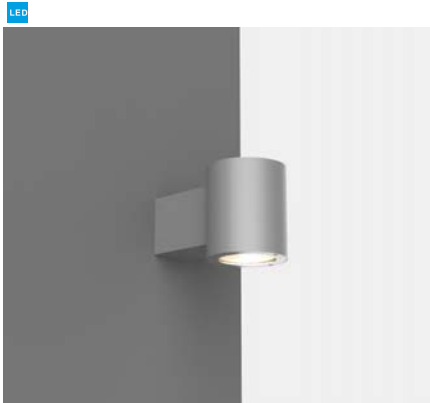

BL-B9570

Optional colors

ZA2A/ZB2A	ZC2A/ZD2A
2PCS CREE CXA2520	2PCS CREE CXA2520
3000K/4000K	3000K/4000K
500mA LED Driver	700mA LED Driver
40W 3800/4000lm	60W 5000/5600lm



CA2A


2 X G12

HIT-CRI

35W-70W




Sqaure small mounting box series

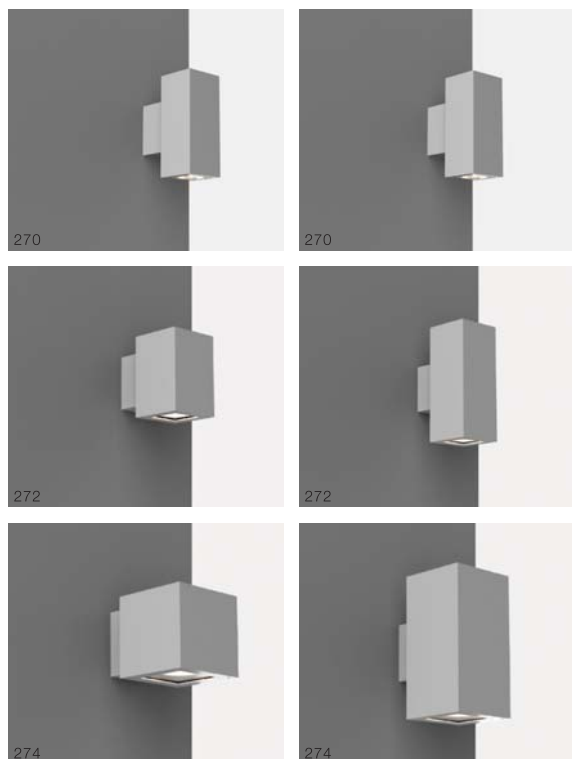


Square small mounting box series

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 3-4mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.

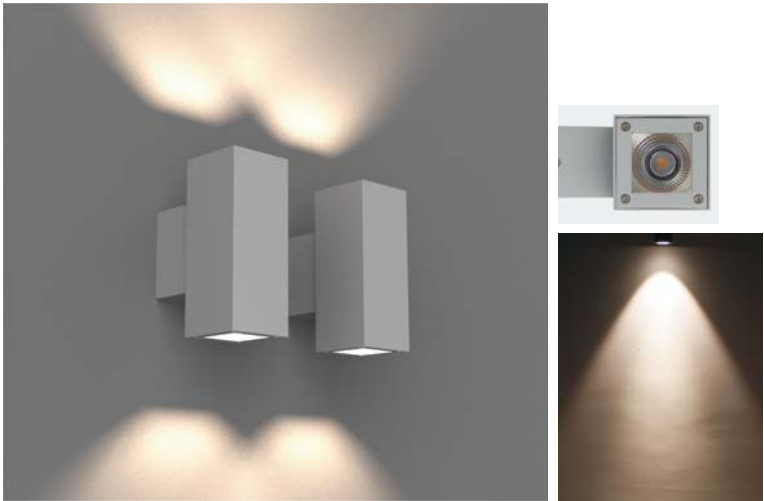

CE CCC OVE CLASS I IP65

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and 3 mm thickness aluminium frame.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

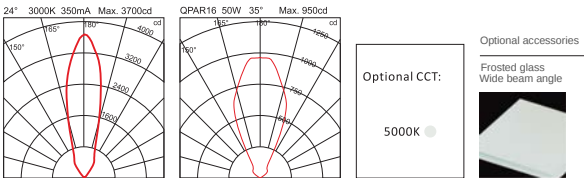


BL-B9573

Optional colors



ZA1A/ZB1A
1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



EA1B
1 X GU10
QPAR16/LED-PAR16
max. 50W/7W




BL-B9572

Optional colors



ZA2A/ZB2A
2PCS CREE CXA1512
3000K/4000K
350mA LED Driver
30W 2580/2760lm




EA2B
2 X GU10
QPAR16/LED-PAR16
max. 50W/7W





- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder coating.
- 304# stainless steel fastness parts.
- 4mm thickness tempered glass.
- Fire-resistant silicon seal gasket.


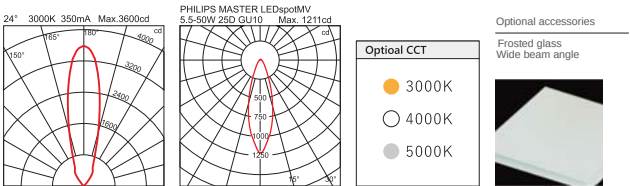


BL-B9563

Optional colors



ZA1A/ZB1A
1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



EA1B
1 X GU10
QPAR16/LED-PAR16
max. 50W/TW



AA1B
1 X E27
QPAR20/LED-PAR20
max. 50W/TW





BL-B9562

Optional colors




ZA2A/ZB2A
2PCS CREE CXA1512
3000K/4000K
350mA LED Driver
30W 2580/2760lm




EA2A
2 X GU10
QPAR16/LED-PAR16
max. 50W/TW




AA2B
2 X E27
QPAR20/LED-PAR20
max. 50W/TW



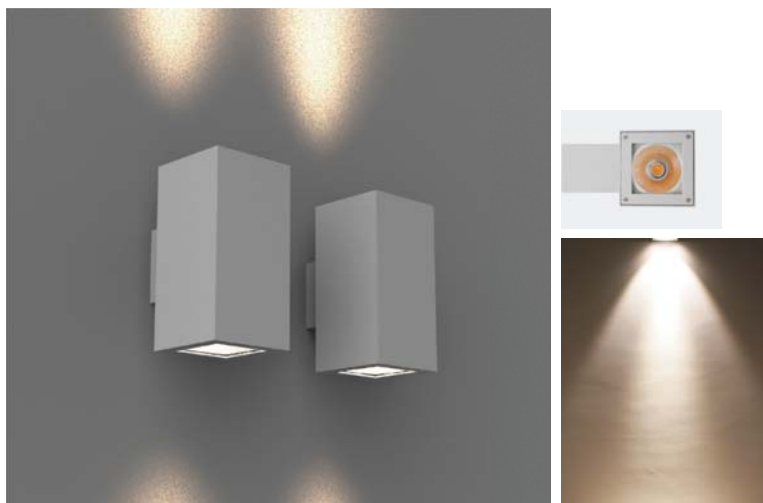

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder coating.
- 304# stainless steel fastness parts.
- 4mm thickness tempered glass.
- Fire-resistant silicon seal gasket.

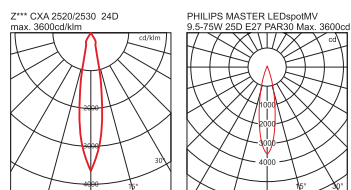

Optional CCT	
●	3000K
○	4000K
●	5000K

Optional accessories

Frosted glass
Wide beam angle

BL-B9565

Optional colors




ZA1A/ZB1A

1PCS CREE CXA2520
3000K/4000K
700mA LED Driver
30W 2500/2800lm



ZC1A/ZD1A

1PCS CREE CXA2530
3000K/4000K
1050mA LED Driver
45W 4000/4300lm




JA1B/JB1B

9PCS CREE XT-E
3000K/4000K
350mA LED Driver
10.8W 846/1026lm



JC1B/JD1B

9PCS CREE XT-E
3000K/4000K
700mA LED Driver
22.5W 1530/1845lm





AA1C

1 X E27
QPAR30/LED-PAR30
max. 75W/12W



CA1A

1 X G12
HIT-CRI
35-70W

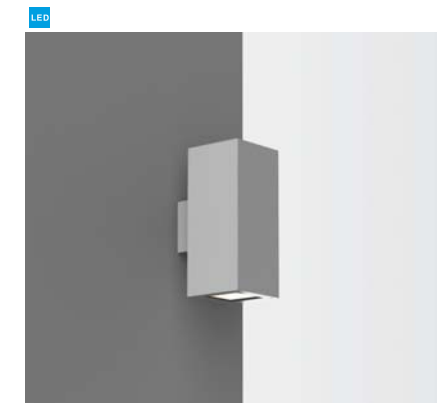

BL-B9564

Optional colors





ZA2A/ZB2A

2PCS CREE CXA2520
3000K/4000K
700mA LED Driver
60W 5000/5600lm



ZC2A/ZD2A

2PCS CREE CXA2530
3000K/4000K
1050mA LED Driver
90W 8000/8600lm




JA2B/JB2B

18PCS CREE XT-E
3000K/4000K
350mA LED Driver
21.6W 1692/2052lm



JC2B/JD2B

18PCS CREE XT-E
3000K/4000K
700mA LED Driver
45W 3060/3690lm




AA2C

2 X E27
QPAR30/LED-PAR30
max. 75W/12W



CA2D

2 X G12
HIT-CRI
35-70W




Sqaure big mounting box series




Square big mounting box series

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 3mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.

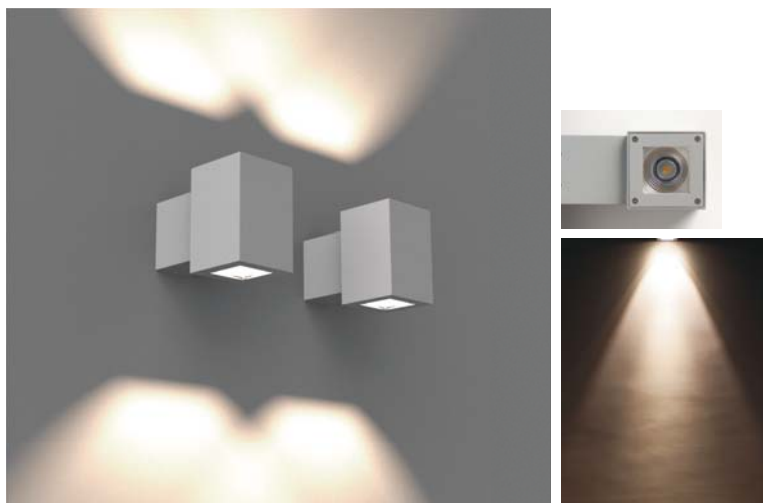

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and 3 mm thickness aluminium frame.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

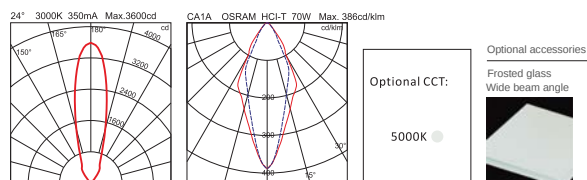

BL-B9575



Optional colors



ZA1A/ZB1A
1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



ZC1A/ZD1A
1PCS CREE CXA2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm



MA1A
1 X PGJ5
HIT-TM-CRI
20-35W



BL-B9574



Optional colors




ZA2A/ZB2A
2PCS CREE CXA1512
3000K/4000K
350mA LED Driver
30W 2580/2760lm




ZC2A/ZD2A
2PCS CREE CXA2520
3000K/4000K
500mA LED Driver
40W 3800/4000lm




MA2A
1 X PGJ5
HIT-TM-CRI
20-35W



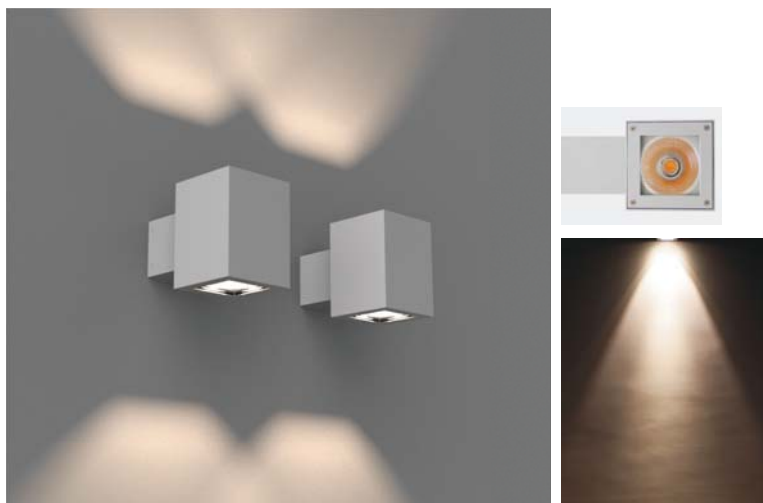


- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part and 3 mm thickness aluminium frame.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- Anodized aluminium reflector.

Z*** CXA 2520/2530 24D
max. 3860cd/klm



CA1A OSRAM HCL-T 70W Max. 386cd/klm



Optional CCT

- 3000K
- 4000K
- 5000K

Optional accessories



BL-B9577

Optional colors




ZA1A/ZB1A

1PCS CREE CXA2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm





ZC1A/ZD1A

1PCS CREE CXA2520
3000K/4000K
700mA LED Driver
30W 2500/2800lm



CA1A

1 X G12
HIT-CRI
35-70W



BL-B9576

Optional colors




ZA2A/ZB2A

2PCS CREE CXA2520
3000K/4000K
500mA LED Driver
40W 3800/4000lm





ZC2A/ZD2A

2PCS CREE CXA2520
3000K/4000K
700mA LED Driver
60W 5000/5600lm




CA2A

1 X G12
HIT-CRI
35-70W



Particular series





Particular series

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 4mm.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron, 500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.



CE CCC O'EL CLASS I IP65

- Die-cast aluminum housing with high corrosion resistance.
- DuPont outdoor electrostatic powder coating.
- 304# stainless steel fastness parts.
- 3mm thickness tempered glass.
- Fire-resistant Silicon seal gasket.

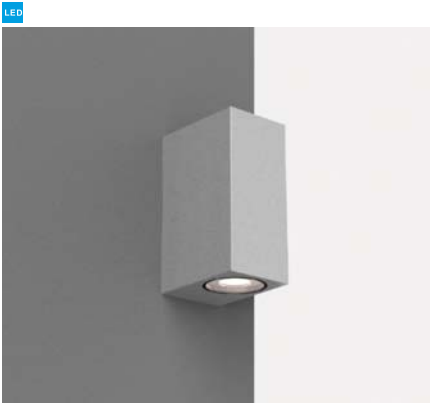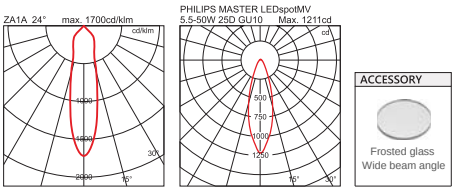

BL-B9587

Optional colors



ZA1A/ZB1A

1PCS CREE CXA1507
3000K/4000K
200mA LED Driver
9W 730/780lm




ZC1A/ZD1A

1PCS CREE CXA1512
3000K/4000K
350mA LED Driver
15W 1290/1380lm



ZA2A/ZB2A

2PCS CREE CXA1507
3000K/4000K
200mA LED Driver
18W 1460/1560lm



EA1A


1 X GU10
QPAR16/LED-PAR16
max. 50W/7W




EA2A

2 X GU10
QPAR16/LED-PAR16
max. 50W/7W



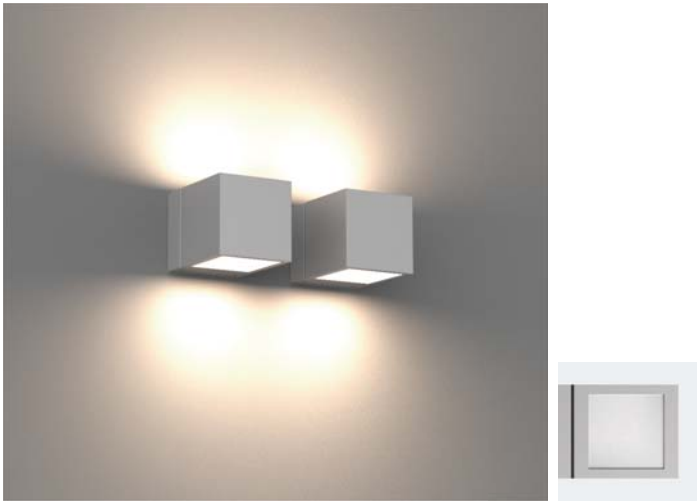

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- 2.0W/(m-k)MCPCB.



BL-B9401

Optional colors



JA1A/JB1A

3PCS CREE XT-E
3000K/4000K
700mA LED Driver
7.5W 570/615lm



JA2A/JB2A


6PCS CREE XT-E
3000K/4000K
700mA LED Driver
15W 1140/1230lm




DA2A

1 X G9
QT14
max.40W



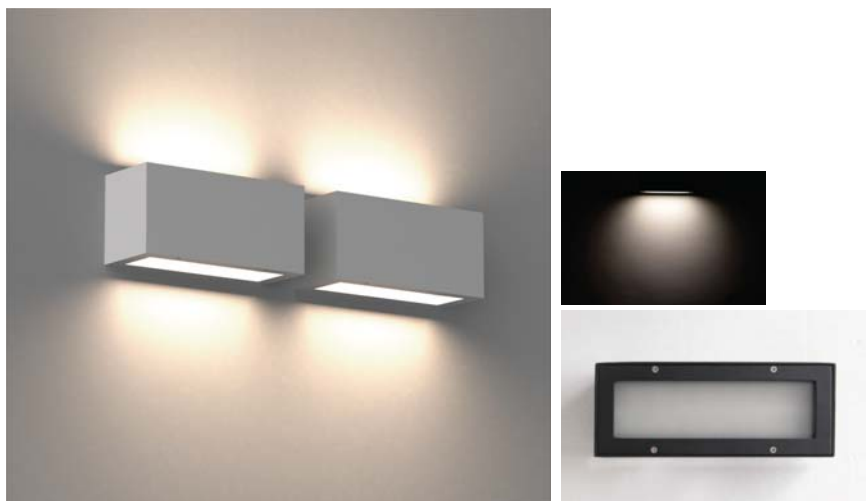

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.



BL-B9584

Optional
colors



YA1A/YB1A

96PCS 3528 soft LED
3000K/4000K
With LED Driver, AC200-240V
8W



YC1B/YD1B

144PCS 3528 soft LED
3000K/4000K
With LED Driver, AC200-240V
12W



YE1C/YF1C

192PCS 3528 soft LED
3000K/4000K
With LED Driver, AC200-240V
16W



YA2A/YB2A

192PCS 3528 soft LED
3000K/4000K
With LED Driver, AC200-240V
16W



YC2B/YD2B

288PCS 3528 soft LED
3000K/4000K
With LED Driver, AC100-240V
24W



YE2C/YF2C

384PCS 3528 soft LED
3000K/4000K
With LED Driver, AC100-240V
32W



American series




American series

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser, thickness 4mm . Or PMMA diffuser.
- Fire-resistant silicon gasket for good waterproof, IP65.
- High purity aluminium heat conduction piece.
- 304 standard stainless steel fastness part.
- DuPont professional outdoor powder painting finished normal thickness 100 micron,500 hours salt spray test endurance rating.
- All wiring, socket and connectors are heat resistant as per IEC.60598 with CE, VDE, CCC.
- Luminaires are certified by CE, RoHS, CCC.



CE CCC O/E CLASS I IP65

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part.
- Diffuser is PMMA plastic.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.
- 2.0W/(m-k)MCPCB.




BL-B9582

Optional colors

JA1A/JB1A
7PCS CREE XT-E
3000K/4000K
700mA LED Driver
17.5W 1330/1435lm



RA1A
1 X G24d
TC-D
13-18W
IP54

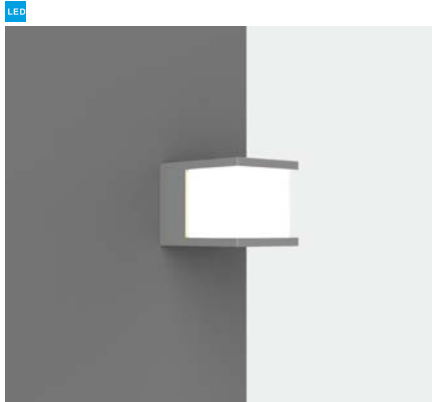

BL-B9583


Optional colors

JA1A/JB1A
7PCS CREE XT-E
3000K/4000K
700mA LED Driver
17.5W 1330/1435lm



RA1A
1 X G24d
TC-D
13-18W
IP54



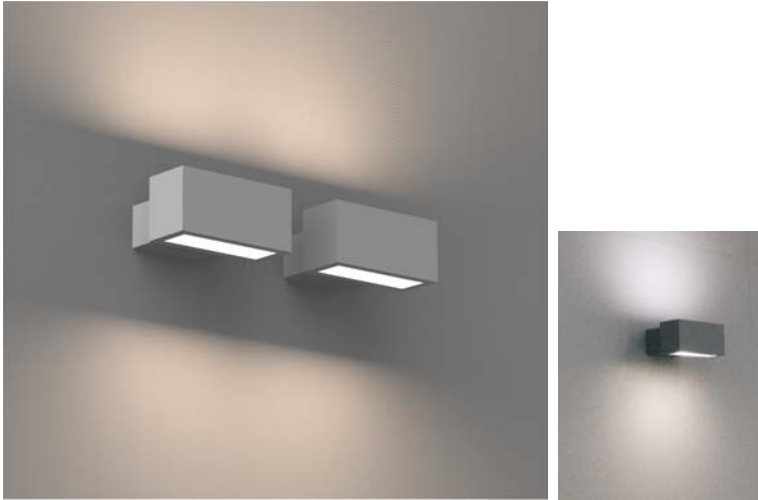

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- DuPont outdoor electrostatic powder painting.
- 304# standard stainless steel fastness part.
- 3mm thickness tempered glass.
- High purity aluminium heat conduction piece.
- Fire-resistant silicon seal gasket.



BL-B9580

Optional colors



ZA1A/ZB1A

1PCS CREE CXA2520
3000K/4000K
500mA LED Driver
20W 1900/2000lm



ZC1A/ZD1A

1PCS CREE CXA2530
3000K/4000K
700mA LED Driver
30W 2500/2800lm



KA1A

1 X Rx7s
HIT-DE-CRI
max. 70W



AA1B

1 X E27
TC-ESE
max. 23W



BL-B9581

Optional colors




ZA2A/ZB2A

2PCS CREE CXA2520
3000K/4000K
500mA LED Driver
40W 3800/4000lm



ZC2A/ZD2A

2PCS CREE CXA2520
3000K/4000K
700mA LED Driver
60W 5000/5600lm



KA2A

1 X Rx7s
HIT-DE-CRI
max. 70W



AA2B

1 X E27
TC-ESE
max. 23W

